


# AGR Silicone Wire

## Silicone Wire

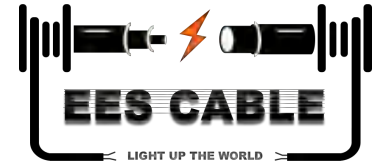

## AGR Silicone Wire

- Rated Voltage:500V
- Rated Temperature:-60°C~+200°C

## Composition:

- Conductor: flexible tinned copper or bare copper
- Insulation: silicone rubber

## Application:

Wiring of electrical household appliance,lamps,electrical equipment and high temperature environment,etc.



Spec mm <sup>2</sup>	Conductor		Insulation Thickness		Wire Diameter		Max resistance 20 <sup>0</sup> C
	Structure No./mm	Diameter mm	Nominal mm	Min mm	Nominal mm	Tolerance mm	Ω/KM
2.5	49/0.25	2.00	0.80	0.62	3.60	±0.20	8.21
4.0	56/0.30	2.70	0.90	0.62	4.50	±0.20	5.09
6.0	84/0.30	3.30	0.95	0.62	5.20	±0.20	3.39
10.0	84/0.40	4.60	1.10	0.80	6.80	±0.25	1.95